


# Ref. 8550

## PLAQUITA INTERCAMBIABLE TORNEADO SNMG SNMG Turning Indexable Insert Plaquette tournage SNMG

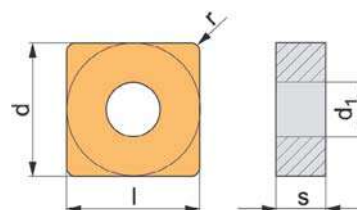

Condiciones Corte  
Cutting Conditions  
Conditions coupe

Dimensiones Dimensions

ISO	l mm	d mm	s mm	d <sub>1</sub> mm	r mm	f mm	a <sub>p</sub> mm	10	N° Art.		N° Art. P-710	N° Art. P-720	€
									C-G15 C-515	C-G25 C-525			
<b>Acabado / Finishing / Finition</b>													
SNMG-120404-E-ZFM	12,70	12,70	4,76	5,16	0,40	0,05-0,25	0,10-1,50	10	18039	26313	18044		9,60
SNMG-120408-E-ZFM	12,70	12,70	4,76	5,16	0,80	0,10-0,40	0,10-1,50	10		42919			9,60
<b>Semi-Desbaste / Semi-Roughing / Semi-Ébauche</b>													
SNMG-120408-E-ZM	12,70	12,70	4,76	5,16	0,80	0,15-0,50	0,50-6,00	10	18045	26314			9,60
SNMG-120412-E-ZM	12,70	12,70	4,76	5,16	1,20	0,18-0,60	0,80-6,00	10	18047	26316	18055		9,60
<b>Desbaste / Roughing / Ébauche</b>													
SNMG-120408-E-ZR	12,70	12,70	4,76	5,16	0,80	0,20-0,55	0,80-7,00	10		18078	18079		9,60
SNMG-120412-E-ZR	12,70	12,70	4,76	5,16	1,20	0,25-0,70	1,00-7,00	10	18085		18171		9,60
<b>INOX Semi-Desbaste / Semi-Roughing Stainless / INOX Semi-Ébauche</b>													
SNMG-090304-E-ZNM	9,52	9,52	3,18	3,81	0,40	0,10-0,30	0,50-4,50	10				73532	8,90
SNMG-120408-E-ZNM	12,70	12,70	4,76	5,16	0,80	0,12-0,45	0,50-6,40	10				35206	9,60
SNMG-120412-E-ZNM	12,70	12,70	4,76	5,16	1,20	0,15-0,60	0,50-6,40	10				72894	10,65

Condiciones Corte  
Cutting Conditions  
Conditions coupe


Dimensiones Dimensions

ISO	l mm	d mm	s mm	d <sub>1</sub> mm	r mm	f mm	a <sub>p</sub> mm	10	N° Art.		€
									C-S15	C-S25	
<b>INOX Acabado Alto Rendimiento / High Performance Finishing Stainless / INOX Finition Haut Rendement</b>											
SNMG-120408-ZNF	12,70	12,70	4,76	5,16	0,80	0,12-0,45	0,50-6,40	10	81957	16979	10,65
SNMG-120412-ZNF	12,70	12,70	4,76	5,16	1,20	0,15-0,60	0,50-6,40	10	16984	16985	10,65

Ejemplo Pedido / Order Example / Exemple commande: **Porta Plaquetas / Tool Holder / Porte-Plaquettes: Ref. 8550 SNMG-120404-E-ZFM C-515** **Pag. 558**

# Ref. 8554

## PLAQUITA INTERCAMBIABLE TORNEADO SPUN SPUN Turning Indexable Insert Plaquette tournage SPUN



Condiciones Corte  
Cutting Conditions  
Conditions coupe

Dimensiones Dimensions

ISO	l mm	d mm	s mm	r mm	f mm	a <sub>p</sub> mm	10	N° Art.		€
								C-525		
SPUN-120308	12,70	12,70	3,18	0,80	0,15-0,40	1,00-5,00	10	42920		8,50
SPUN-120312	12,70	12,70	3,18	1,20	0,20-0,50	1,00-5,00	10	42921		8,50



Ejemplo Pedido / Order Example / Exemple commande: **Porta Plaquetas / Tool Holder / Porte-Plaquettes: Ref. 8554 SPUN-120308 C-525** **Pag. 552**

