


Ref. **1025**


**BROCA MANGO CILÍNDRICO CORTE IZQUIERDA. SERIE CORTA**

Left Hand Straight Shank Drill Bit. Jobber Series

Foret queue cylindrique coupe à gauche

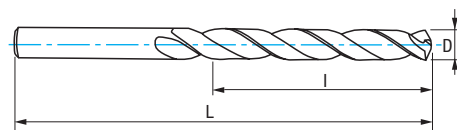

HSS	DIN 338 N					Blue Finish	Rectificado Ground Taillé meulé	Tol. D h8
-----	-----------	--	--	--	--	-------------	------------------------------------	-----------



Material		Vc (m/min)	Avances f/rev. (mm/rev) - Feed - Pas					
Grupo	Sub.	HSS	Ø 3	Ø 4	Ø 5	Ø 6	Ø 8	Ø 10
P	P.1	25-30	0,055	0,070	0,080	0,100	0,120	0,150
K	K.1	30-35	0,090	0,100	0,120	0,150	0,180	0,210
	K.2	25-30	0,070	0,080	0,100	0,120	0,140	0,170
N	N.3	60-80	0,110	0,130	0,150	0,190	0,220	0,260
	N.4		0,110	0,130	0,150	0,190	0,220	0,260
	N.5	40-50	0,090	0,100	0,120	0,150	0,180	0,210

$$r.p.m. = \frac{V_c \times 1.000}{\pi \times \phi}$$

$$V_f (mm/min.) = r.p.m. \times f$$

D mm	L mm	I mm		N° Art. HSS	€
1,00	34	12	10	10554	3,32
1,50	40	18	10	10560	3,32
2,00	49	24	10	10562	3,02
2,50	57	30	10	10564	3,02
3,00	61	33	10	10569	2,29
3,50	70	39	10	11121	2,68
4,00	75	43	10	11566	3,02
4,50	80	47	10	11811	3,43
5,00	86	52	10	11817	3,71
5,50	93	57	10	11820	4,93
6,00	93	57	10	12001	5,08
6,50	101	63	10	12330	5,92
7,00	109	69	10	12336	7,19
7,50	109	69	10	12339	7,56
8,00	117	75	10	12345	8,65
8,50	117	75	10	12348	9,32
9,00	125	81	10	12399	11,35
9,50	125	81	10	12408	12,39
10,00	133	87	10	12417	13,33
11,00	142	94	5	70015	21,47
12,00	151	101	5	70016	25,52
13,00	151	101	5	70017	32,19

