


Ref. 8270


PORTA-PLAQUITAS FRESADO ESCUADRA SAP-16D

SAP-16D Square Milling Tool-Holder

Porte-Plaquettes fraiseage équerre SAP-16D

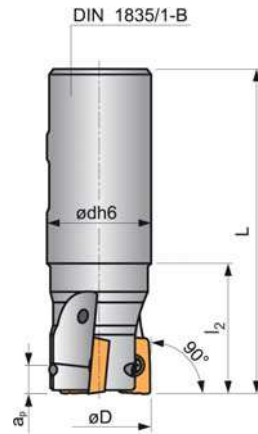


γ_p	+0-8°	K_r	90°
γ_f	0°	$a_{p,max}$	13,50 mm




Tipo Mecanizado Machining Type - Type d'Usage		

ISO	dh6	D	L	I_2	Z	N° Art.	€		
25-SAP-16D	25	25	100	30	2	20759	198,79	Ref. 8816 T 15 Art. 35217 3,32 €	Ref. 8801 ZT-15 Art. 10512 10,74 €
32-SAP-16D	32	32	110	35	3	20762	210,48	T-15 Art. 10895 3,32 €	
40-SAP-16D	32	40	110	35	4	20789	228,03		

Plaquita / Insert / Plaque: Pag. 543, 544

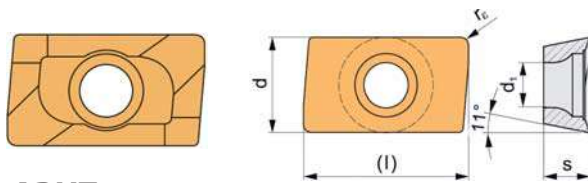

APHT

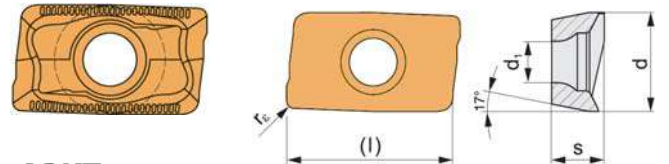

APKT

ISO	Calidades / Qualities / Qualités									Dimensiones Dimensions				
	C-526	P-605	P610	P-615	P-620	P-625	P-630	P-640	P-010	l	d	s	d ₁	r _ε
APHT-160408PDFR-FA										16	9,45	5,35	4,5	0,8
APKT-1604PDER	●				●		●	●		16	9,45	5,35	4,6	0,8

Plaquita / Insert / Plaque: Pag. 543, 544

Geometría Geometry Géométrie	Foto Picture Photo	Grupo Materiales Pieza Trabajo Workpiece Material Group Groupe matériaux pièce travail		
		Fresado Milling Fraisage	P M K S N H	
		Acabado Finishing Finition		
		Desb. Medio Roug. & Finish. Semi-Finition		
		Desb. Grueso Coarse Rough. Ébauche		
APHT	Filo Corte Cutting Edge Arête coupe			<p>Condiciones Corte Cutting Conditions Conditions coupe</p> <p>f_z 0,07-0,20 mm/z</p> <p>a_p 1,00-13,50 mm</p>

Geometría Geometry Géométrie	Foto Picture Photo	Grupo Materiales Pieza Trabajo Workpiece Material Group Groupe matériaux pièce travail		
		Fresado Milling Fraisage	P M K S N H	
		Acabado Finishing Finition		
		Desb. Medio Roug. & Finish. Semi-Finition		
		Desb. Grueso Coarse Rough. Ébauche		
APKT-PDER	Filo Corte Cutting Edge Arête coupe			<p>Condiciones Corte Cutting Conditions Conditions coupe</p> <p>f_z 0,07-0,15 mm/z</p> <p>a_p 1,00-13,50 mm</p>