


Ref. **4067**

FRESA HUECA MÁQUINAS ELECTROMAGNÉTICAS TCT LARGA

Long TCT Core Drill

Fraise à carotter pour unité de perçage électromagnétique TCT longue

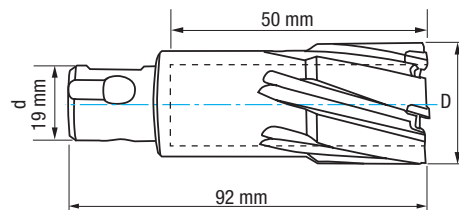

| | | |
|--|---|---|
| MD/HM TCT | Serie Larga Long Length Série longue | Apto con Poca Lubricación Suitable with Minimal Cooling Apte avec lubrification minimale |
| Apto para Madera Suitable for Wood Adapté au bois | UNIVERSAL: NITTO + WELDON | |

| Material | | RPM | | | | | | | | | |
|----------|------|------|------|------|------|------|------|------|------|------|------|
| Grupo | Sub. | Ø 12 | Ø 14 | Ø 16 | Ø 18 | Ø 20 | Ø 25 | Ø 30 | Ø 40 | Ø 50 | Ø 60 |
| P | P.1 | 981 | 841 | 736 | 654 | 588 | 471 | 392 | 294 | 235 | 196 |
| | P.2 | 928 | 795 | 696 | 618 | 557 | 445 | 371 | 278 | 222 | 185 |
| | P.3 | 795 | 682 | 596 | 530 | 477 | 381 | 318 | 238 | 190 | 159 |
| M | | 530 | 454 | 397 | 353 | 318 | 254 | 212 | 159 | 127 | 106 |
| K | K.1 | 1591 | 1364 | 1193 | 1061 | 954 | 763 | 636 | 477 | 381 | 318 |
| N | N.1 | 928 | 795 | 696 | 618 | 557 | 445 | 371 | 278 | 222 | 185 |
| | N.2 | 928 | 795 | 696 | 618 | 557 | 445 | 371 | 278 | 222 | 185 |
| | N.3 | 2387 | 2046 | 1790 | 1591 | 1432 | 1145 | 954 | 716 | 572 | 477 |

| D mm | d mm | L mm | I mm | Nº Art. TCT | € |
|------|------|------|------|-------------|-------|
| 14 | 19 | 92 | 50 | 61248 | 60,24 |
| 15 | 19 | 92 | 50 | 61249 | 60,24 |
| 16 | 19 | 92 | 50 | 61250 | 60,24 |
| 17 | 19 | 92 | 50 | 61251 | 60,24 |
| 18 | 19 | 92 | 50 | 61252 | 60,24 |
| 19 | 19 | 92 | 50 | 61253 | 60,24 |
| 20 | 19 | 92 | 50 | 61254 | 60,24 |
| 21 | 19 | 92 | 50 | 61255 | 63,19 |
| 22 | 19 | 92 | 50 | 61256 | 63,19 |
| 23 | 19 | 92 | 50 | 61257 | 63,19 |
| 24 | 19 | 92 | 50 | 61258 | 63,27 |
| 25 | 19 | 92 | 50 | 61259 | 63,27 |
| 26 | 19 | 92 | 50 | 61260 | 75,76 |
| 27 | 19 | 92 | 50 | 61261 | 75,76 |
| 28 | 19 | 92 | 50 | 61262 | 75,89 |
| 29 | 19 | 92 | 50 | 61263 | 75,89 |

| D mm | d mm | L mm | I mm | Nº Art. TCT | € |
|------|------|------|------|-------------|--------|
| 30 | 19 | 92 | 50 | 61264 | 75,89 |
| 31 | 19 | 92 | 50 | 61265 | 91,37 |
| 32 | 19 | 92 | 50 | 61266 | 91,37 |
| 33 | 19 | 92 | 50 | 61267 | 91,37 |
| 34 | 19 | 92 | 50 | 61268 | 91,37 |
| 35 | 19 | 92 | 50 | 61269 | 91,37 |
| 36 | 19 | 92 | 50 | 61270 | 104,31 |
| 37 | 19 | 92 | 50 | 61271 | 104,70 |
| 38 | 19 | 92 | 50 | 61272 | 104,70 |
| 39 | 19 | 92 | 50 | 61273 | 104,70 |
| 40 | 19 | 92 | 50 | 61274 | 104,70 |
| 41 | 19 | 92 | 50 | 61275 | 126,30 |
| 42 | 19 | 92 | 50 | 61276 | 126,30 |
| 43 | 19 | 92 | 50 | 61277 | 126,30 |
| 44 | 19 | 92 | 50 | 61278 | 126,30 |
| 45 | 19 | 92 | 50 | 61279 | 126,30 |

| D mm | d mm | L mm | I mm | Nº Art. TCT | € |
|------|------|------|------|-------------|--------|
| 46 | 19 | 92 | 50 | 61280 | 147,03 |
| 47 | 19 | 92 | 50 | 61281 | 147,12 |
| 48 | 19 | 92 | 50 | 61282 | 147,12 |
| 49 | 19 | 92 | 50 | 61283 | 147,12 |
| 50 | 19 | 92 | 50 | 61199 | 147,12 |
| 51 | 19 | 92 | 50 | 61284 | 166,26 |
| 52 | 19 | 92 | 50 | 61285 | 166,89 |
| 53 | 19 | 92 | 50 | 61286 | 166,89 |
| 54 | 19 | 92 | 50 | 61287 | 166,89 |
| 55 | 19 | 92 | 50 | 61288 | 166,89 |
| 56 | 19 | 92 | 50 | 61289 | 183,06 |
| 57 | 19 | 92 | 50 | 61290 | 183,06 |
| 58 | 19 | 92 | 50 | 61291 | 183,06 |
| 59 | 19 | 92 | 50 | 61292 | 194,04 |
| 60 | 19 | 92 | 50 | 61293 | 199,56 |

Ref. **4075**

EXPULSORES

Pilot Pins

Ejecteurs



| | |
|-----|--|
| HSS | |
|-----|--|

| D mm | L mm | Cap. mm | Para/For/Pour Ref. | Nº Art. HSS | € |
|------|------|---------|--------------------|-------------|-------|
| 6,34 | 106 | 12-17 | 4067 (50 mm) | 61501 | 22,05 |
| 7,98 | 105 | 18-60 | 4067 (50 mm) | 61503 | 26,46 |